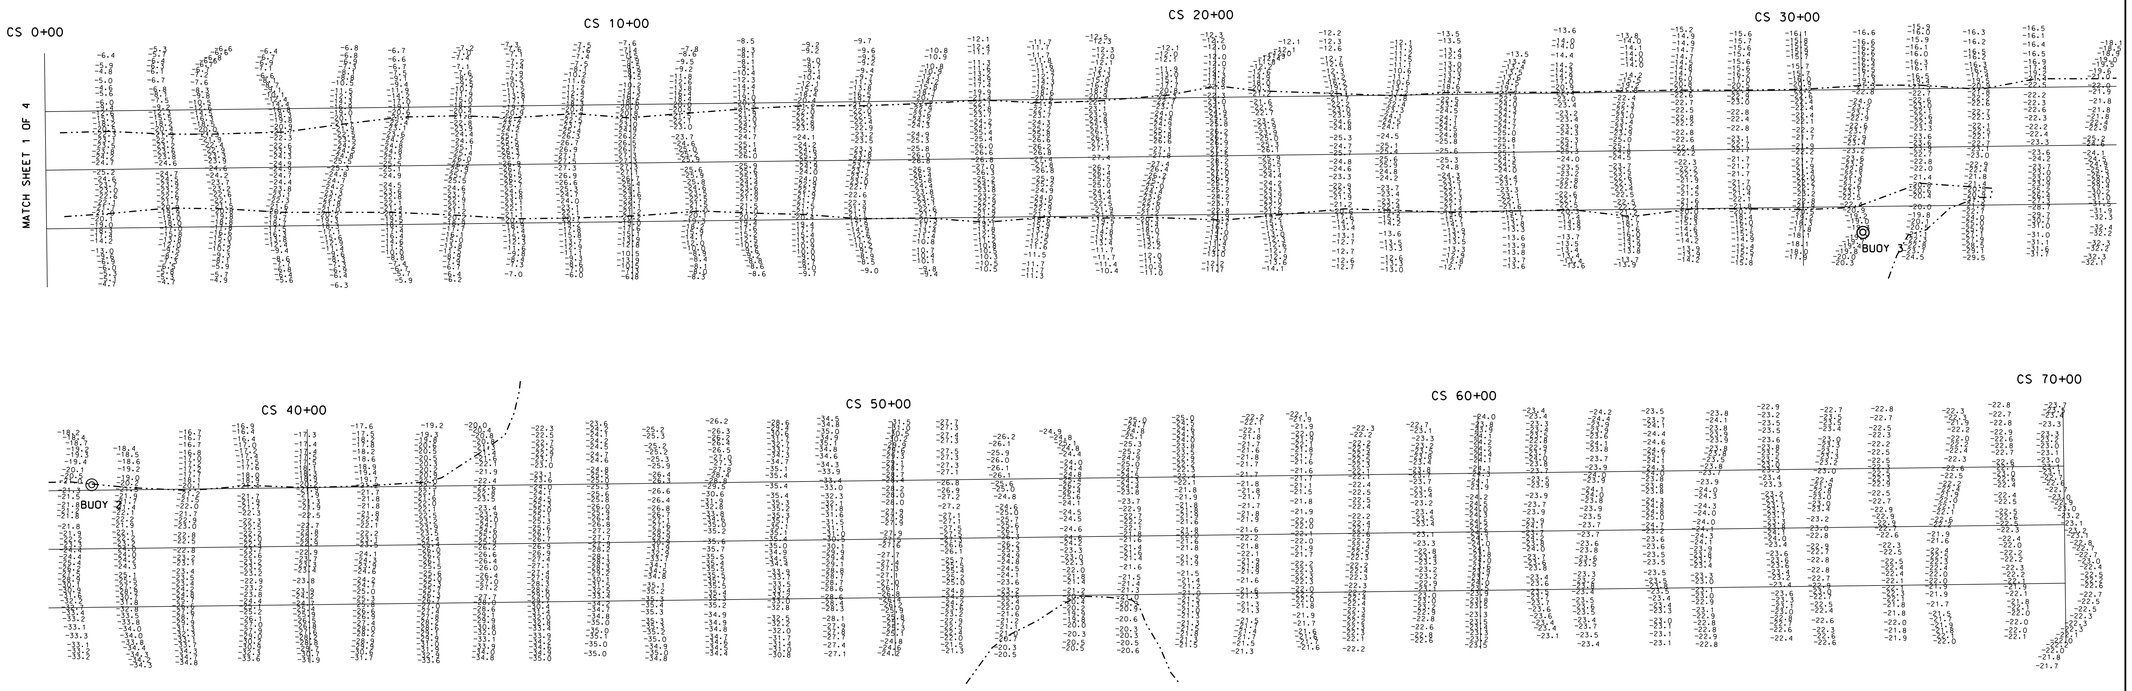

WATER LEVEL / GAGE INFORMATION

Water level elevations (gage) obtained during the survey were from TMG SEAL CORNER. SEE SHEET 2 OF 4 FOR LOCATION.

TBM was established from NGS vertical control point BM RANGE (PID GK0021).

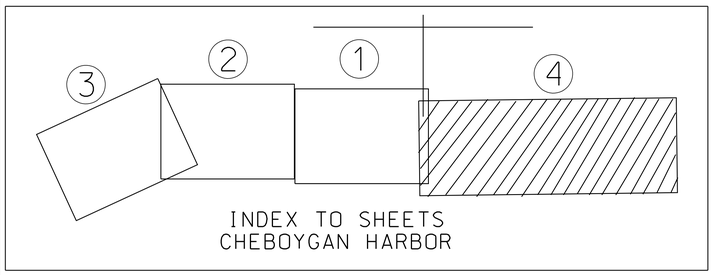

LEGEND

The information depicted on this map represents the results of the surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time.

LOW WATER DATUM

All depths and project depths are referred to Low Water Datum elevation 577.5 ft. above Mean Water Level. (I.G.L.D. 85).

GRID COORDINATES

Grids shown are based on the National Geodetic Survey Projection Tables. State of Michigan. Central Zone (2112). Lambert Projection. 1983 North American Datum. US SURVEY FOOT.

Navigation Buoys

Location of navigation buoys represents that general location on the date of the survey and cannot be considered for navigation.

Project Information

Project Depth - 21.0 Ft.

21.0 Ft. contour shown thus

Survey Information

Survey by	R. DELESTOWICZ
Date of Survey	10, 11 June 2008
Position system	STARLINK 212C DGPS via Coast Guard System
Sonic sounder	Innerspace 448
Transducer	208 KHz with 8.0 degree beam angle

CENTERLINE TURNING POINTS

STATION	EAST	NORTH
A	19,660,236.8	853,441.9
B	19,664,028.4	859,325.8

CHANNEL LIMITS TURNING POINTS

STATION	EAST	NORTH
C	19,660,152.7	853,496.1
D	19,639,944.4	859,380.0
E	19,660,320.9	853,387.8
F	19,664,112.5	859,271.7

NO.	DATE	REVISION	BY

U.S. ARMY ENGINEER DISTRICT, DETROIT
CORPS OF ENGINEERS
DETROIT, MICHIGAN

DESIGNED BY:
DRAWN BY: R. DELESTOWICZ
CHECKED BY:
REVIEWED BY:
SUBMITTED BY:
CHIEF, PROJ OPNS SEC

CHEBOYGAN HARBOR, MI.

BAY SECTION

CONDITION 10, 11 June 2008

SAGINAW FIELD OFFICE

APPROVAL RECOMMENDED:
CHIEF, OPERATIONS & MAINTENANCE BR
DATE

APPROVED:
CHIEF, CONSTRUCTION-OPERATIONS DIVISION

SCALE: 1 INCH = 100 FT.

CADD FILE NAME

DRAWING NUMBER
CHR0408C.DGN

SHEET 4 OF 4